تریلر چادری سقف ثابت سه محـور

FIXED ROOF & SIDE CURTAINSIDER 3 AXLEX

KRAL

کرال صنعت مرنـــد

KRAL SANAT MARAND

Fixed Roof & Side Curtainsider 3 Axles (CH245-B)

Dimensions	Length: 13,740 mm (inside 13,670) | Width: 2,550 mm (inside 2,480) | Height: 4,050 mm (Load height 2,730)
Max. Payload	26 tons (93 cubic meter) | Ability to carry 34 standard pallets
Weight	6,880 kg - Approximately
Body	Front wall from Aluminum profile / Steel integrated corner pillars / steel side posts as sliding mechanism and positioned opposite each other symmetrically | Drop side doors (4 or 5) from special Aluminum profile / Plank pockets for AL stanchions | Flooring from 28 mm water resistant anti scratch plywood
Curtain	Special polymer with high temperature resistance (from -30˚c to +70˚c) Tear resistant / incl. Reinforcing strips / High color stability /High tensile strength/Welding adhesion
Rear Door	Special Aluminum profile with steel pillars 8 x Aluminum hinges, 2 x Galvanized locks and Special sealing rubber
Chassis	Chassis & components from St. 52-3 / QST 380 / S 500 | Automatic CO2 welding technology / Merkle, Germany Main I beams with standard flat bar | All steel stamping parts are assembled using special fixture & automatic devices
Axle	3 x 9 tons SAF® | Front axle with automatic lifting capability
Suspension	Air suspension with special shock absorbers | Lowering and rising of trailer height
Tire/Rim	6 x Radial tires 385/65 R22.5 | 6 x Single rims 11.75 x R22.5"
Landing Gear	2 mechanically operated landing legs 24 tons dynamic capacity & 50 tons static capacity | Operated from right side.
King Pin	2" dia. (162 KN) with coupling according to SAE standard with special bolster plate according to UNECE regulation ECE-R55 standard | Corner dimension :2040 mm
Braking System	**Knorr ,WABCO, HALDEX** 2S/2M Disk/ according to ECE-R13 standard. | Dual circuit pneumatic with automatic load sensing valves | Two double acting diaphragm brake chambers (2 rear axles) EBS incl. ABS & RSP (Roll Stability Program) / Emergency valve / Parking brake/Reset-to-Ride height function.
Electrical System	7 & 15 Poles quick release connector with 24 volts rear and side lights plus LED alarming system According to UNECE regulation R48.
Painting	Shot blasted according to SA 2.5 / Epoxy sub-coat Final polyurethane coating as per customer requirement/Color According to RAL system
Accessories	Rear guard protection / Rear under-run protection according to UNECE Regulation ECE-R73 / Rubber buffer absorbers (rear) / 2 x Carrier hooks /6 x Semi-circle mudguards / 2 x Rear (suppression system according to UNECE Regulation-EU 109/2011) / 2 x Wheel chocks and holders /Fire extinguisher bracket / Spare wheel carrier with clamp mechanism/ 2 x Tool boxes (2.5 m) with two different models /Load lashing belts / 3-Step Ladder Under Platform / Aluminum ladder / Rear door rubber buffer shock absorbers/Rear door stopper / Side protection and Reflective Ribbon outline marking on side/rear according to UNECE Regulation.
Options	125 L Stainless steel water tank / Spare tire & rim / Tire-pressure monitoring system (TPMS)

Certified by INSO (Iran National Standards Organization) & European Commission

تریلر چادری سقف ثابت سه محور (CH245-B)

ابعاد	طول (میلیمتر): ۱۳،۷۴۰ (داخل ۱۳،۶۷۰) | عرض (میلیمتر): ۲،۵۵۰ (داخل ۲،۴۸۰) | ارتفاع (میلیمتر): ۴،۰۵۰ (بارخور ۲،۷۳۰)
ظرفیت	۲۶ تن (۹۳ متر مکعب) | قابلیت جاگیری ۳۴ عدد پالت استاندارد
وزن	۶،۸۸۰ کیلوگرم – تقریبی
اتاق	تاج جلو از پروفیل آلومینیوم /ستون‌های گوشه فولادی یک تکه / ستون‌های وسط بازشونده و با مکانیزم | ریلی به صورت متقارن نسب به یکدیگر | دربهای بغل (۴ یا ۵) از پروفیل آلومینیوم مخصوص / تیرکهای بغل از مقاطع آلومینیومی | سبک و مستحکم/چوب کف چند لایه خارجی ۲۸ میل، ضد آب با روکش مخصوص
چادر	یک تکه خارجی از پلیمر مخصوص با مقاومت در دمای ۳۰- تا ۷۰+ درجه سانتیگراد مقاوم در برابر پارگی و بریدگی / دارای نوارهای تقویتی / با ماندگاری رنگ / مقاومت مکانیکی بالا/اتصال و چسبندگی بالا
درب عقب	پروفیل آلومینیومی مخصوص با ستونهای فولادی مقاوم دارای ۸ عدد لولای مخصوص آلومینیومی با دو قفل گالوانیزه و لاستیک مخصوص دور درب
شاسی	شاسی و قطعات از فولاد با استحکام بالا St. 52-3/ Q ST 380 / S 500 | جوش آرگون اتوماتیک با فن آوری مرکله آلمان | تیرهای اصلی با تسمه استاندارد | مقاطع پرسی فولادی مونتاژ شده در فیکسچر مخصوص و دستگاه های خودکار
محور	سه عدد محور ۹ تنSAF | محور جلو دارای بالابر اتوماتیک با بوستر تک
زیربندی	سیستم تعلیق بادی بالنی و کمک فنر مخصوص | قابلیت تنظیم ارتفاع تریلر
رینگ و لاستیک	۶ حلقه لاستیک سایز 385/65 R22.5 | ۶ عدد رینگ یک سایز "11.75 x R22.5
پایه توقف	دو سرعته با ظرفیت دینامیکی ۲۴ تن و ظرفیت استاتیکی ۵۰ تن | سمت کمک راننده
میل ریش	۲ اینچ با قدرت ۱۶۲ کیلونیوتن به همراه فلنج مربوطه مطابق استاندارد SAE با ضخامت صفحه ریش مخصوص شعاع چرخش ۲۰۴۰ میلی متر
سیستم ترمز	دیسکی HALDEX , WABCO, Knorr 2S/2M بر طبق استاندارد ECE-R13 | دو مسیر باد اصلی برای تمام چرخها همراه شیر سبک و سنگین اتوماتیک بار | ۲ عدد بوستر جفت برای دو محور عقب | سیستم EBS (ترمز ضد قفل و سامانه ضدواژگونیRSP) / ترمز اضطراری / سیستم قفل پارک/سیستم تنظیم خودکار ارتفاع
سیستم برق	دارای کلید ۷ و ۱۵ پل با خط برق ۲۴ ولت چراغهای عقب و بغل / سیستم هشدار از نوع LED طبق استاندارد جهانی R48
رنگ شاسی	شات شده مطابق استاندارد SA 2.5 / زیرسازی با ضد زنگ اپوکسی رنگ نهایی پلی اورتان طبق نظر مشتری /براساس سیستم کد گذاری RAL
متعلقات	سپر عقب / سپر محافظ عقب بر طبق استاندارد جهانی ECE-R73 / ضربه گیر غلتکی عقب / ۲ عدد قلاب حمل ۶ عدد گلگیر نیم دایره / ۲ عدد گل پخش کن عقب با سیستم ممانعت از پاشش بر طبق استاندارد جهانی EU 109/2011 / ۲ عدد دنده پنج و نگهدارنده/براکت کپسول آتش نشانی / زاپاس بند مستحکم کلمپی / ۲ عدد جعبه ابزار ۲.۵ متری با مدل متفاوت کمربند مهاربار / پله کشویی / نردبان آلومینیومی ۲.۳ متری / ضربه گیر دور درب عقب نگهدارنده جانبی درب عقب / گارد بغل ، شبرنگ مخصوص نصب شده در کنار/ عقب بر طبق استاندارد جهانی
قابل سفارش	تانک آب استیل ۱۲۵ لیتری / رینگ و لاستیک زاپاس / سیستم نشان گر باد تایر

دارای مجوز از سازمان ملی استاندارد و کنوانسیون اروپا

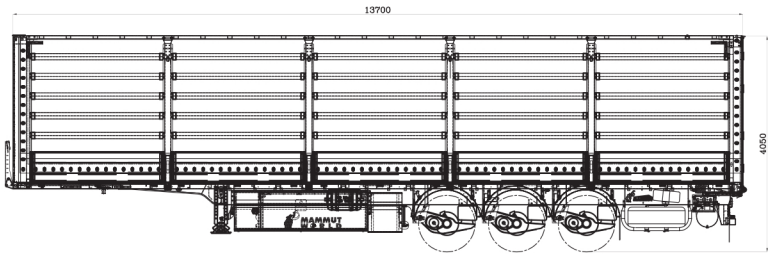

Certificate Control Quality &Testing

(۰۲۱) ۸۶۰ ۸۸ ۳۱۰ | (۰۲۱) ۸۶۰ ۸۵ ۸۴۰
info@kralsanat.com
www.kralsanat.com
تهران، جردن، خیابان نلسون ماندلا، کوچه بابک بهرامی، پلاک ۳۷، طبقه دوم